


# ALTIKÖŞE BAŞLI FLANŞLI CIVATA

HEXAGON HEAD FLANGE BOLTS

SECHSKANTSCHRAUBE MIT FLANSCH

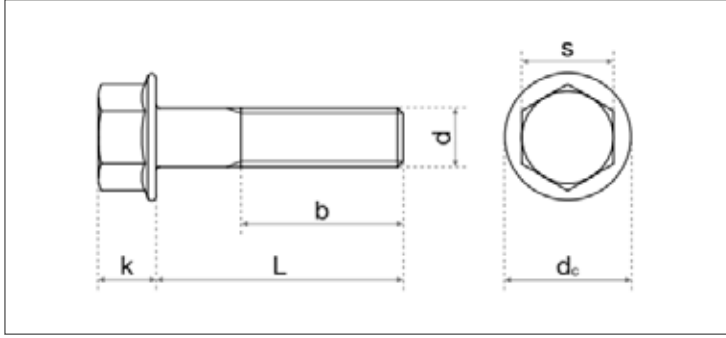

EN	UNI	DIN
<b>1665</b>	-	<b>6921</b>
Mekanik Özellikler - Toleranslar Mechanical Properties - Tolerances Mechanische Eigenschaften - Toleranzen		<b>898-1 ISO 4759-1</b>

## TEKNIK BİLGİLER

## TECHNICAL INFORMATION

## TECHNISCHE INFORMATION

d		M4	M5	M6	M8	M10	M12
p		0,70	0,80	1,00	1,25	1,50	1,75
s	max	7,00	8,00	10,00	13,00	15,00	16,00
	min		7,78	9,78	12,73	14,73	15,73
e	max		8,71	10,95	14,26	16,50	17,62
k	max	4,00	5,40	6,60	8,10	9,20	11,50
d <sub>c</sub>	max	9,50	11,80	14,20	18,00	22,30	26,60
b	b ≤ 125		16,00	18,00	22,00	26,00	30,00
	b ≤ 125 (125 < l ≤ 200)				28,00	32,00	36,00
	b > 200						

l	min	max	M4	M5	M6	M8	M10	M12
8	7,71	8,29	1,99	3,45	5,84			
10	9,71	10,29	2,14	3,70	6,18			
12	11,65	12,35	2,30	3,94	6,52	12,70		
14	15,65	16,35	2,45	4,19	6,87	13,30		
16	15,65	16,35	2,60	4,44	7,21	14,00	24,70	
18	17,65	18,35	2,76	4,69	7,56	14,60		
20	19,58	20,42	2,91	4,95	7,90	15,20	27,70	43,20
22	21,58	22,42	3,06	5,20	8,25	15,80	25,70	45,20
25	24,58	25,42	3,30	6,40	8,95	16,70	30,00	46,60
30	29,58	30,42	3,69	7,20	11,00	21,70	31,60	50,00
35	34,50	35,50			12,00	23,70	36,00	53,40
40	39,50	40,50			13,30	25,70	42,40	63,00
45	44,50	45,50			14,50	27,50	45,40	72,00
50	49,50	50,50			15,50	29,50	48,50	76,00