


YUVARLAK BAŞLI DİBİ DÖRT KÖŞE CIVATA

MUSHROOM HEAD SQUARE NECK BOLTS

FLACHRUNDSCHRAUBE MIT VIERKANTANSATZ

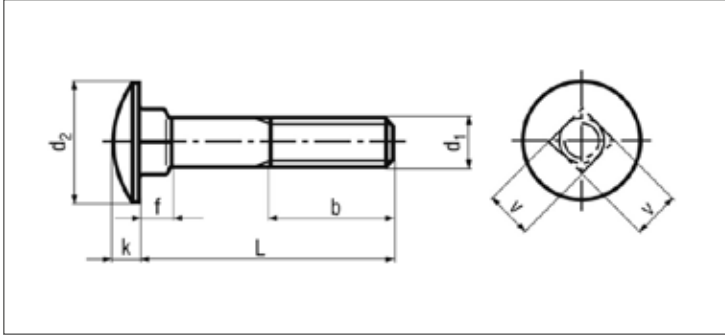

ISO	UNI	DIN
8677	5731	603
<p>Mekanik Özellikler - Toleranslar Mechanical Properties - Tolerances Mechanische Eigenschaften - Toleranzen</p>		<p>898-1 ISO 4759-1</p>

TEKNİK BİLGİLER

TECHNICAL INFORMATIONS

TECHNISCHE INFORMATION

d		M6	M8	M10	M12	M16
p		1,25	1,50	1,75	2,00	2,50
k	max	3,88	4,88	5,38	6,95	8,95
	min	3,12	4,12	4,62	6,05	8,05
d2 max(dk)	max	16,55	20,65	24,65	30,65	38,80
	min	15,45	19,35	23,35	29,35	37,20
c (f)	max	4,60	5,60	6,60	8,75	12,90
	min	3,40	4,40	5,40	7,25	11,10
v	max	6,48	8,58	10,58	12,70	16,70
	min	5,52	7,42	9,42	11,30	15,30
b	I ≤ 125	18,00	22,00	26,00	30,00	38,00
	I > 125 (125 < I ≤ 200)	24,00	28,00	32,00	36,00	44,00
	I > 200		41,00	45,00	49,00	57,00

l	min	max	M6	M8	M10	M12	M16
16	15,10	16,90	6,90				
20	18,95	21,05	7,60	13,80	22,70		
25	23,95	26,05	8,50	15,40	25,40		
30	28,95	31,05	9,60	17,00	27,70	45,70	
35	33,75	36,25	10,70	19,00	30,20	49,40	
40	38,75	41,25	11,80	21,00	32,70	53,10	
45	43,75	46,25	12,90	23,00	35,80	56,80	
50	48,75	51,25	14,00	25,00	38,90	61,20	119,00
55	53,50	56,50	15,10	26,90	42,00	65,60	
60	58,50	61,50	16,20	28,90	45,10	70,00	
65	63,50	66,50		30,90	48,20	74,40	
70	68,50	71,50	18,40	32,90	51,30	78,80	
75	74,40	75,60		34,90	54,40		
80	78,50	81,50	20,60	36,80	57,50	87,00	
90	88,25	91,75	22,80	40,80	63,70	96,00	
100	98,25	101,75	25,00	44,80	69,90	105,00	
110	108,25	111,75		48,80	76,10		
120	118,25	121,75		53,80	82,30		
130	128,00	132,00		56,80	88,50		
140	138,00	142,00		60,80	95,00		