


SUNTA VİDASI

POZI FLAT HEAD CHIPBOARD SCREW

POZI-FLACHKOPF-SPANPLATTENSCHRAUBE

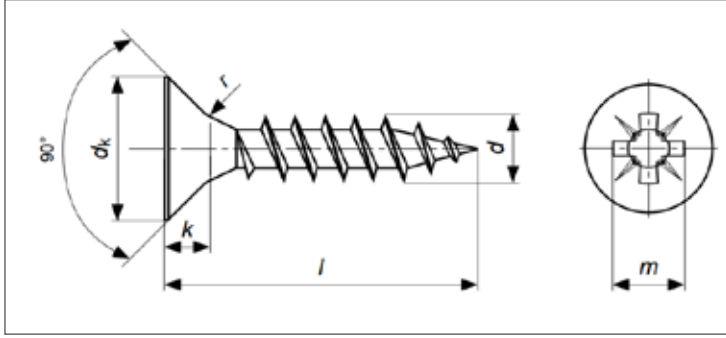

ISO	UNI	DIN
-	-	7505A
Mekanik Özellikler - Toleranslar Mechanical Properties - Tolerances Mechanische Eigenschaften - Toleranzen		ISO 2702 ISO 4759-1

TEKNİK BİLGİLER

TECHNICAL INFORMATIONS

TECHNISCHE INFORMATION

d		2,5	3	3,5	4	4,5	5	6
dk	max	5,00	6,00	7,00	8,00	9,00	10,00	12,00
	min	4,70	5,70	6,64	7,64	8,64	9,64	11,57
k	max	1,40	1,80	2,00	2,35	2,55	2,85	3,35
a	max	2,10	2,35	2,60	2,80	3,00	3,20	3,60
r	~	1,50	1,50	1,80	2,00	2,20	2,50	2,50
N°	PZ Drv No Pozi Recess No	1		2				3
m	~	2,51	3,00	4,00	4,40	4,80	5,30	6,60
Soket Derinliği Q Penetration Depth Q	max	1,47	2,01	2,06	2,51	2,92	3,45	3,45
	min	1,22	1,60	1,76	2,05	2,46	2,99	2,99

l	min	max	3	3,5	4	4,5	5	6
10	9,25	10,75		0,38	0,52			
13 (12)	11,10	12,90		0,44	0,60	0,81		
16	15,10	16,90		0,57	0,77	1,03	1,30	
18	17,10	18,90		0,63	0,86	1,14	1,43	
20	18,95	21,05		0,69	0,94	1,25	1,55	1,95
25	23,95	26,05		0,84	1,15	1,52	1,87	2,35
30	28,95	31,05		0,99	1,36	1,79	2,19	2,74
35	33,75	36,25		1,14	1,58	2,07	2,52	3,13
40	38,75	41,25		1,30	1,79	2,34	2,84	3,53
45	43,75	46,25		1,46	2,00	2,61	3,16	3,92
50	48,75	51,25			2,22	2,89	3,48	4,32
55	53,75	56,25				3,17	3,80	4,71
60	58,50	61,50				3,43	4,12	5,10
70*	68,75	71,50				3,97	4,76	5,89
80*	78,50	81,50					5,40	6,68
90*	88,25	91,75						7,47
100*	98,25	101,75						8,25
120*	118,25	121,75						9,30
140*	138,00	142,00						
150*	148,00	152,00						