


YILDIZ HAVŞA BAŞLI SAÇ VİDASI

PHILLIPS COUNTERSUNK FLAT HEAD SELF TAPPING SCREWS

SENK-BLENCHSCHRAUBE MIT KREUZSCHLITZ

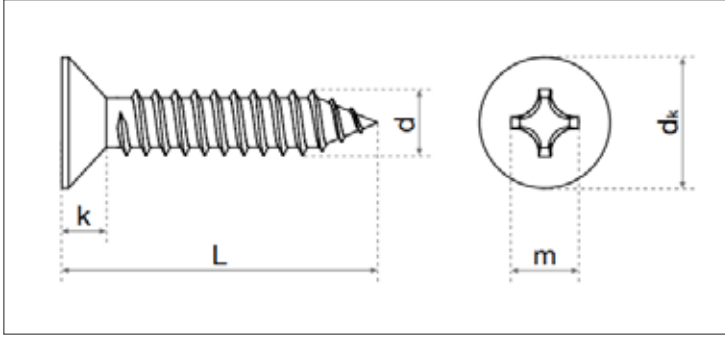

ISO	UNI	DIN
7050	6955	7982
Mekanik Özellikler - Toleranslar Mechanical Properties - Tolerances Mechanische Eigenschaften - Toleranzen		ISO 2702 ISO 4759-1

TEKNİK BİLGİLER

TECHNICAL INFORMATION

TECHNISCHE INFORMATION

d		2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
Dk	max	4,30	5,50	6,80	7,50	8,10	9,50	10,80	12,40
	min	4,00	5,20	6,44	7,14	7,74	9,14	10,37	11,57
k	~	1,30	1,70	2,10	2,30	2,50	3,00	3,40	3,80
r	max	0,80	1,10	1,40	1,50	1,60	1,90	2,10	2,40
Nº	PH Drv No Phillips Recess No	1		2				3	
m	~	2,50	3,00	4,20	4,60	4,70	5,10	6,80	7,10
Soket Derinliği Q Penetration Depth Q	max	1,32	1,70	2,12	2,53	2,62	3,10	3,53	3,91
	min	1,02	1,40	1,62	2,03	2,11	2,59	2,95	3,33

l	Type C		Type F		2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
	min	max	min	max								
4,5	3,70	5,30	3,70	4,50	0,10	0,23						
6,5	5,70	7,30	5,70	6,50	0,14	0,28	8,39	0,47				
9,5	8,70	10,30	8,70	9,50	0,20	0,50	0,54	0,66	0,77	1,10		
13	12,20	13,80	12,20	13,00	0,27	0,48	0,72	0,88	1,02	1,45	2,11	2,53
16	15,20	16,60	15,20	16,00	0,33	0,58	0,87	1,07	1,23	1,75	2,49	3,07
19	18,20	19,80	18,20	19,00		0,69	1,02	1,26	1,44	2,05	2,87	3,61
22	21,20	22,80	20,70	22,00		0,80	1,17	1,45	1,65	2,35	3,26	4,15
25	24,20	25,80	23,70	25,00		0,91	1,32	1,64	1,86	2,65	3,65	4,69
32	30,70	33,30	30,70	32,00		1,16	1,85	2,31	2,50	3,35	4,56	5,95
38	36,70	39,30	36,70	38,00		1,34	2,15	2,46	2,77	3,95	5,34	7,03
45	43,70	46,30	43,70	45,00			2,32	2,99	3,26	4,65	6,25	8,29
50	48,70	51,30	48,70	50,00			2,57	3,31	3,61	5,15	6,90	9,19