


SİLİNDİR BAŞLI AĞAÇ VİDASI

SLOTTED ROUND HEAD WOOD SCREWS

HALBRUND-HOLZSCHRAUBEN MIT SCHLITZ

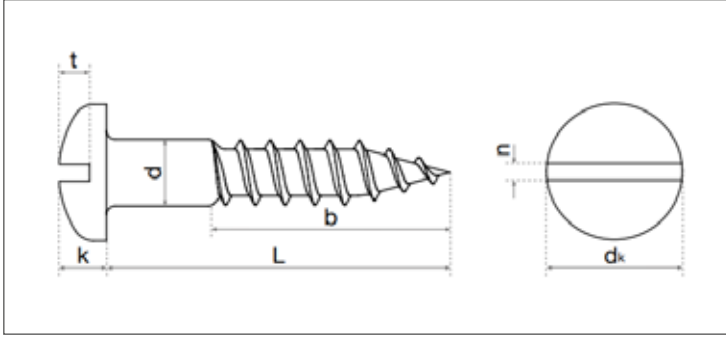

ISO	UNI	DIN
-	701	96
Mekanik Özellikler - Toleranslar Mechanical Properties - Tolerances Mechanische Eigenschaften - Toleranzen		DIN 267-1 ISO 4759

TEKNİK BİLGİLER

TECHNICAL INFORMATION

TECHNISCHE INFORMATION

d	≥	2,5	3	3,5	4	4,5	5	5,5	6
b	Max	0,61							
ds	Min	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00
	Max	2,10	2,60	3,02	3,52	4,02	4,52	5,02	5,52
dk	Min	5,38	6,38	7,45	8,45	9,45	10,45	11,55	12,55
	Max	4,62	5,62	6,55	7,55	8,55	9,55	10,45	11,45
k	Min	1,90	2,30	2,60	3,00	3,34	3,74	4,04	4,44
	Max	1,50	1,90	2,10	2,60	2,86	3,26	3,56	3,96
n	Min	0,80	1,00	1,00	1,20	1,20	1,51	1,51	1,91
	max	0,66	0,86	0,86	1,06	1,06	1,26	1,26	1,66
t	Min	1,10	1,35	1,60	1,80	2,00	2,30	2,50	2,70
		1,10	1,35	1,60	1,80	2,00	2,30	2,50	2,70

l	Min	Max							
8	7,25	8,75	0,400						
10	9,25	10,75	0,460	0,763	1,03				
12	11,10	12,90	0,520	0,856	1,16	1,63			
14	13,10	14,90	0,642	1,04	1,41	1,93	2,51	3,31	
16	15,10	16,90							
18	17,10	18,90							
20	19,00	21,00	0,763	1,23	1,68	2,24	2,88	3,78	5,83
25	24,00	26,00	0,914	1,47	1,98	2,62	3,37	4,37	6,66
30	29,00	31,00	1,06	1,70	2,29	3,01	3,85	5,00	7,50
35	33,75	36,25		1,94	2,60	3,39	4,34	5,55	8,33
40	38,75	41,25		2,18	2,91	3,77	4,83	6,14	9,17
45	43,75	46,25			3,22	4,12	4,12	6,73	10,00
50	48,75	51,25			3,53	4,50	5,80	7,32	10,80
60	58,50	61,50			4,16	5,26	6,77	8,54	12,50
70	68,50	71,50						9,72	14,20
80	78,50	81,50							16,00